

FLOODED DEEP CYCLE BATTERY

2 OS 33P



Series	5000	Warranty	5 Years
Volts	2	BCI	SPEC
Cells	1	Plates/Cell	33
Terminal Type	Flag		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18		

Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	4536
Marine Crank Amps (MCA) 32°F / 0°C	5670
Reserve Capacity (RC @ 25A)	4692 Minutes
Reserve Capacity (RC @ 75A)	1564 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	2522 AH	25.22 A
@ 72 Hour Rate	2385 AH	33.13 A
@ 50 Hour Rate	2258 AH	45.17 A
@ 20 Hour Rate	1955 AH	97.76 A
@ 15 Hour Rate	1818 AH	121.22 A
@ 10 Hour Rate	1740 AH	174.01 A
@ 8 Hour Rate	1681 AH	210.18 A
@ 5 Hour Rate	1564 AH	312.83 A
@ 1 Hour Rate	880 AH	879.84 A

Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.


Specifications

	Weight	100.5 kg	221.5 lbs
	Length	39.2 cm	15.44"
	Width	21.1 cm	8.31"
	Height Inc. Term.	63 cm	24.81"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Electrolyte Reserve	95 mm	3.75"
Container (Inner)	Polypropylene	
Cover (Inner)	Polypropylene - heat sealed to inner container	
Container (Outer)	High Density Polyethylene	
Cover (Outer)	High Density Polyethylene snap fit to outer container	
Handles	Molded	

Cycle Life vs. Depth of Discharge

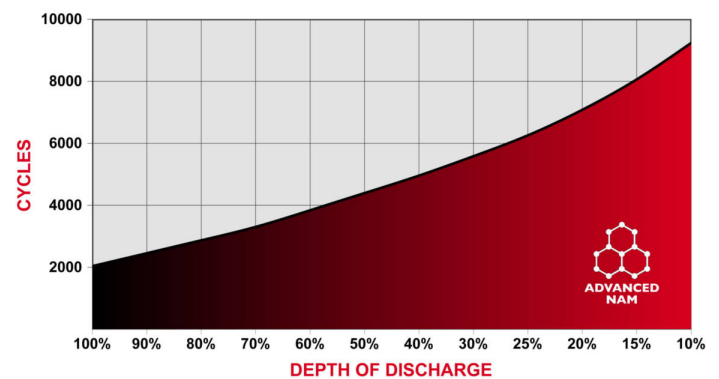

Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.05 V	2.02 V	1.96 V	1.75 V
6 HR AH RATE	2.10 V	2.04 V	2.00 V	1.95 V	1.75 V
1 HR AH RATE	2.10 V	2.03 V	1.99 V	1.94 V	1.75 V

Rev.#3 | May 2019