



Series	FS	Warranty	1 Year
Volts	6	BCI	GC2
Cells	3	Plates/Cell	19
Terminal Type	DT		
Included Hardware	Stainless Steel K-Lock Nut		
Size & Thread	5/16"-18		

Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)		
Float Voltage Range	2.25 V/cell @ 25°C (77°F)		
Recommended Charge Current	30 A		
Maximum Charge Current	50 A		
Self-Discharge Rate	5%-10% per month at 25°C (77°F)		

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	703			
Marine Crank Amps (MCA) 32°F / 0°C	879			
Reserve Capacity (RC @ 25A)	465 Minutes			
Reserve Capacity (RC @ 75A)	122 Minutes			
Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	307 AH	3.07 A
@ 72 Hour Rate	302 AH	4.20 A
@ 50 Hour Rate	286 AH	5.71 A
@ 20 Hour Rate	240 AH	12.00 A
@ 15 Hour Rate	228 AH	15.20 A
@ 10 Hour Rate	211 AH	21.12 A
@ 8 Hour Rate	206 AH	25.80 A
@ 5 Hour Rate	190 AH	37.92 A
@ 1 Hour Rate	96 AH	96.0 A


Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications

	Weight	30.0 kg	66.0 lbs
	Length	25.9 cm	10.19"
	Width	18.1 cm	7.13"
	Height Inc. Term.	27.9 cm	11"
Electrolyte Reserve	57 mm	2.25"	
Container	Polypropylene		
Cover	Polypropylene		
Handles	Top Molded Strap Brackets		

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Cycle Life vs. Depth of Discharge

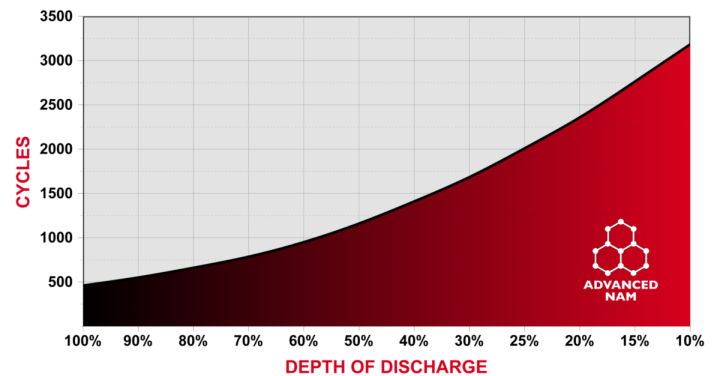

Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V

Detailed Illustration

