


FLOODED DEEP CYCLE BATTERY

8 HHG 25P



Series	4000	Warranty	3 Years
Volts	8	BCI	SPEC
Cells	4	Plates/Cell	25
Terminal Type	Flag L		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18		

Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -18°C	1239
Marine Crank Amps (MCA) 32°F / 0°C	1549
Reserve Capacity (RC @ 25A)	660 Minutes
Reserve Capacity (RC @ 75A)	220 Minutes

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	366 AH	3.66 A
@ 72 Hour Rate	347 AH	4.81 A
@ 50 Hour Rate	327 AH	6.55 A
@ 20 Hour Rate	275 AH	13.75 A
@ 15 Hour Rate	261 AH	17.42 A
@ 10 Hour Rate	242 AH	24.2 A
@ 8 Hour Rate	237 AH	29.56 A
@ 5 Hour Rate	217 AH	43.45 A
@ 1 Hour Rate	110 AH	110 A

Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.


Specifications

	Weight	59 kg	130 lbs
	Length	62.2 cm	24.5"
	Width	18.7 cm	7.38"
	Height Inc. Term.	29.2 cm	11.5"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Electrolyte Reserve	70 mm	2.75"
Container (Inner)	Polypropylene	
Cover (Inner)	Polypropylene - heat sealed to inner container	
Container (Outer)	High Density Polyethylene	
Cover (Outer)	High Density Polyethylene snap fit to outer container	
Handles	Rope / Plastic Handle	

Cycle Life vs. Depth of Discharge

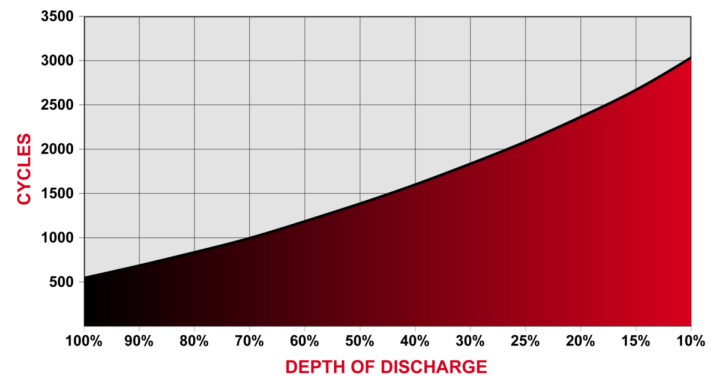

Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V