



| | | | |
|-------------------|------------------------|----------|--------------------|
| Series | GEL | Warranty | See Warranty Terms |
| Volts | 2 | BCI | 2V OPzV |
| Cells | 1 | | |
| Terminal Type | F10 | | |
| Included Hardware | Threaded Insert & Bolt | | |
| Size & Thread | F10-M10 | | |

Charge

| | |
|----------------------------|---------------------------------------|
| Recommended Charge Current | 200 A |
| Self-Discharge Rate | Less than 2% per month at 25°C (77°F) |
| Internal Resistance | 0.16 mΩ |

Capacity

| | | | | |
|--------------------------------|--------------|-------------|------------|-------------|
| Capacity Affect by Temperature | 40°C (104°F) | 25°C (77°F) | 0°C (32°F) | -15°C (5°F) |
| | 105% | 100% | 89% | 79% |

| Hour Rate | Capacity / AMP Hour | Current / AMPs |
|-----------------|---------------------|-----------------|
| @ 100 Hour Rate | 2927 AH | 29.27 A |
| @ 20 Hour Rate | 2437 AH | 121.85 A |
| @ 10 Hour Rate | 2160 AH | 216 A |


Specifications

| | | | |
|--|-------------------|---------|---------|
| | Weight | 156 kg | 344 lbs |
| | Length | 39.9 cm | 15.71" |
| | Width | 21.4 cm | 8.43" |
| | Height Inc. Term. | 79.9 cm | 31.46" |

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

| | |
|-----------|------|
| Container | ABS |
| Cover | ABS |
| Handles | None |

Cycle Life vs. Depth of Discharge

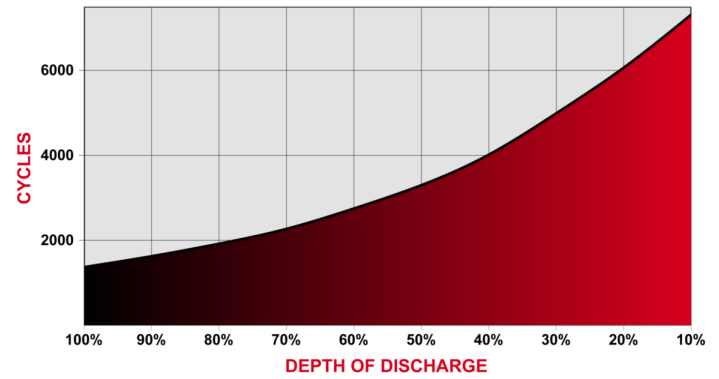

Capacity vs. Temperature

