



Series	FS	Warranty	1 Year
Volts	12	BCI	GC12
Cells	6	Plates/Cell	11
Terminal Type	UTL		
Included Hardware	Stainless Steel K-Lock Nut		
Size & Thread	5/16"-18		

### Charge

Charge Voltage Range	14.7-15 V/cell @ 25°C (77°F)
Recommended Charge Current	15 A
Maximum Charge Current	25 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

### Capacity

Cold Crank Amps (CCA) 0°F / -18°C	563			
Marine Crank Amps (MCA) 32°F / 0°C	703			
Reserve Capacity (RC @ 25A)	280 Minutes			
Reserve Capacity (RC @ 56A)	100 Minutes			
Reserve Capacity (RC @ 75A)	69 Minutes			
Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	75%	50%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	<b>206 AH</b>	<b>2.06 A</b>
@ 72 Hour Rate	<b>195 AH</b>	<b>2.71 A</b>
@ 50 Hour Rate	<b>184 AH</b>	<b>3.69 A</b>
@ 20 Hour Rate	<b>155 AH</b>	<b>7.75 A</b>
@ 15 Hour Rate	<b>147 AH</b>	<b>9.82 A</b>
@ 10 Hour Rate	<b>136 AH</b>	<b>13.64 A</b>
@ 8 Hour Rate	<b>133 AH</b>	<b>16.66 A</b>
@ 5 Hour Rate	<b>122 AH</b>	<b>24.49 A</b>
@ 1 Hour Rate	<b>62 AH</b>	<b>62 A</b>


Ampere hour capacity ratings based on specific gravity of 1.280 at 27°C (80°F). Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

### Specifications

 SAI GLOBAL ISO 9001 Quality	Weight	37.5 kg	82.5 lbs
	Length	33.3 cm	13.13"
	Width	18.2 cm	7.17"
	Height Inc. Term.	27.4 cm	10.8"
Electrolyte Reserve	38 mm	1.5"	
Container	Polypropylene		
Cover	Polypropylene		
Handles	Top Molded Strap Brackets		

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

### Cycle Life vs. Depth of Discharge

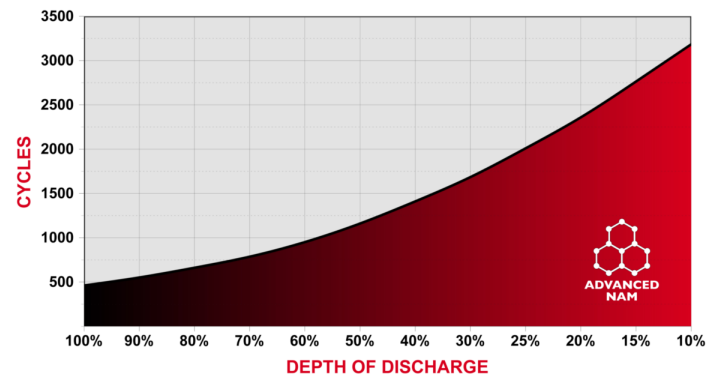

### Voltage vs. Depth of Discharge

DISCHARGE	0%	25%	50%	75%	100%
20 HR AH RATE	2.10 V	2.07 V	2.00 V	1.92 V	1.75 V
10 HR AH RATE	2.10 V	2.06 V	1.98 V	1.89 V	1.75 V
3 HR AH RATE	2.10 V	2.03 V	1.95 V	1.86 V	1.75 V
1 HR AH RATE	2.10 V	2.01 V	1.93 V	1.84 V	1.75 V

### Detailed Illustration

